



ThermoJet::

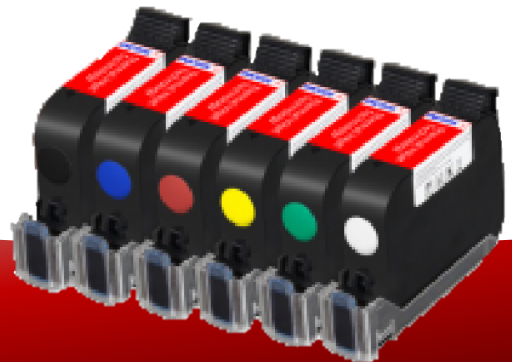

E-Series

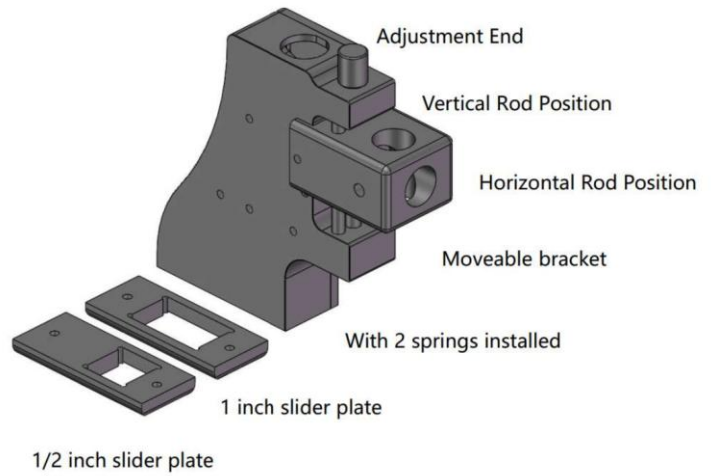


www.promark.co.th
promark-promark@hotmail.com
sales@promark.co.th
02-719-6770-3 081-659-2276





Product Name	V7 Series TIJ Printers [Applied to 1/2 inch and 1 inch]
Printing Technology	TIJ2.5 thermal foaming
Printer's Material	Avionic-level aluminium
Operation System	Linux
Data Interface	USB memory
Parameters of Screen	7inch capacity touch screen (1024*600px)
Electrical supply	Input: AC100-240V,50/60Hz,1.5A Output: 13.5V/3A
Applicable Ink	Water-based ink / weak solvent-based ink / strong solvent-based ink / UV ink
Applicable Type of Ink Cartridges	All types of 12.7mm ink cartridges or All types of 25.4 mm ink cartridges
Exchange of Types of Ink Cartridges	12.7mm ink cartridges or 25.4 mm ink cartridges can be exchanged easily by changing slider plates on print heads and setting on system
Allowed Maximum Quantity of Print Heads	1P
Allowed Maximum Printing Height	1P print head: maximum printing height of 1/2 inch ink cartridges is 12.7mm / that of 1 inch ink cartridges is 25.4mm;
Printing Mode	Option: [Senor] , [Continuous printing-dis] , [Continuous printing-time]
Speed	Option: [Velocity] [Encoder]
Special Application	Option: [Repeat printing] , [Continuous printing]
Printing DPI	Vertical: 300dpi/200dpi/150dpi/100dpi/75dpi
Grey Level	Grey by1-9 level
Printing Speed	110m/min [fixed data] ,80m/min [variable data]
Printing Times	Maximum printing times for [fixed data] is 12+/s , 720 products/min Maximum printing times for [Variable data] is 10+/s , 600 products/min
Nozzle Printing on Ink Cartridges	Option: Left Channel / Right Channel
Supported Fonts	TTF, TTC, OTF
Printing Content	Texts in different languages / Date / Graphs / Bar code [GS1 code/ QR code] / Counter/ Batch number/ Variable database (Texts / Graphic codes) / Separator
Types of Bar Code	"Qr code" , "PDF417" , "Data Matrix" , "GS1-DM" , "UPCA" , "UPCE" , "EAN13" , "EAN8" , "INT25" , "Code 39" , "Code 128" , "EAN128" , "ITF14" (other codes necessary for customers can be added)
Image Format / Data Format	Jpg, Png, Bmp / Excel, csv , txt, log
Operation Temperature	0-45°C (32-113°F)
Humidity	20-80% RH

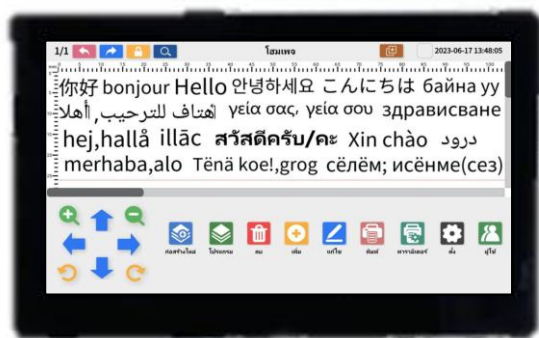

PROMARK

PROMARK COMPANY LIMITED

2 Soi Rewadee 42, Rewadee Rd.,
Talat Khwan, Mueang Nonthaburi,
Nonthaburi 11000 Thailand
Tel : (662)719-6770-3
Fax : (662)719-6531

Email :
- sales@promark.co.th
- promark@promark.co.th
- promark-promark@hotmail.com
Website : www.promark.co.th