

ThermoJet::



S-Series



10 Inch Touch Screen
Customize Boot Screen






Free Switch
Half inch & One inch

200+
Languages

MAX

4 Print Heads
101.6mm Print Height
120m/min Speed

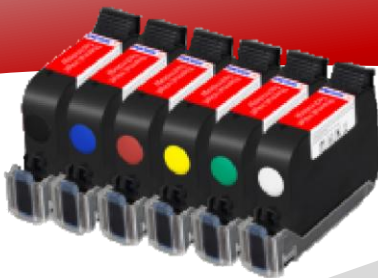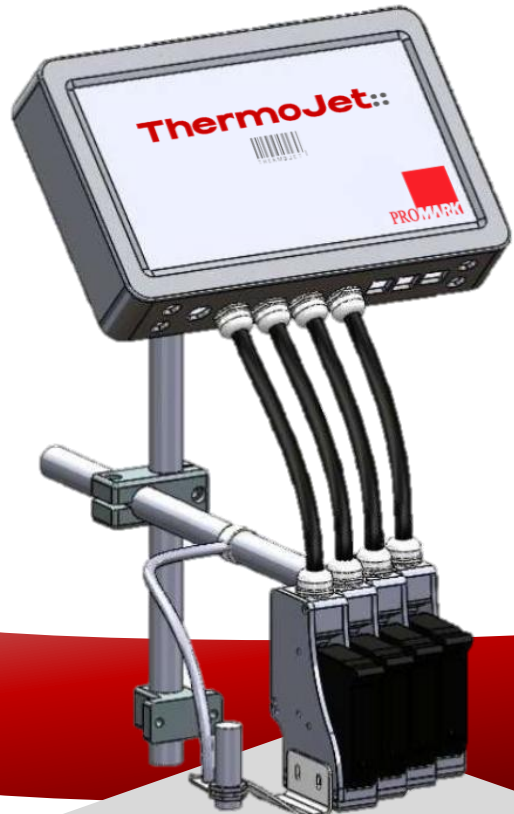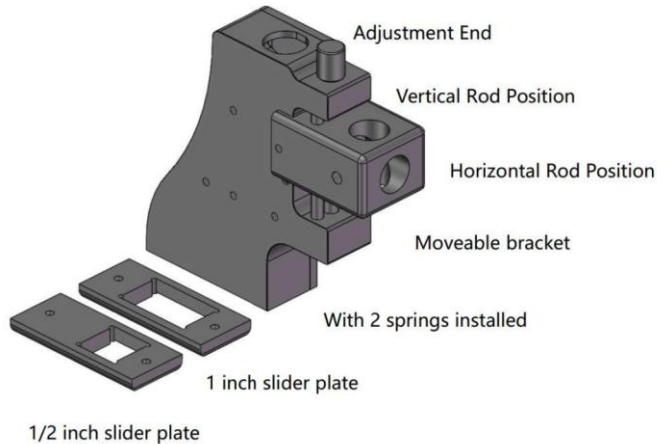


www.promark.co.th
promark-promark@hotmail.com
sales@promark.co.th
02-719-6770-3 081-659-2276





Parameter	Value
Printing Technology	TIJ (Thermal Ink Jet Technology)
Parameters of Power Supply	Input: AC100-240V,50/60Hz Output: 30V/3A (for single head online printer) or 30V/5A (for 2 or more heads online printer)
Working Environment	- Temperature: 0-45°C - humidity: 30-80%Rh
Screen	10.1" (Touch Screen 1024x600px)
Type of Ink Cartridge	12.7mm (0.5") or 25.4mm (1") - For POROUS : Water-based Ink - For NON-POROUS : Solvent-based / UV Ink - Color : Black, Blue, Red, Yellow, Green, White (Recommended : Black)
No. of Printheads	1-4 Printheads
Printing Speed	- Maximum printing speed for 90dpi double-row channels: 539m/min - Maximum printing speed for 150dpi double-row channels: 420m/min - Maximum printing speed for 300dpi double-row channels: 210m/min
Throw Distance	2-5mm ensures the best printing quality
Printing Times	- Maximum printing times for [fixed data] is 80+/s , 4800 products/min - Maximum printing times for [Variable data] is 6+/s , 360 products/min
Printing Content	Texts in different languages / date / graphs / bar code [GS1 code/ QR code] / counter/ batch number/ variable database (texts / graphic codes) / random number / real-time transmission data / separator/ data from scanners
Allowed Input Languages	It allows 233+ input languages from different countries (languages around the world, including Simplified English, Japanese, Korean, French, Spanish, Portuguese, Italian, Turkish, Thai, Russian, German, Dutch, Arabic, Ukrainian, Mongolian, Uzbek, Malaysian, Indonesian, etc.)
Socket/Serial Communication Protocol	- Socket Communication Protocol (Network Interface) - Serial Communication Protocol (RS232 Interface)
Cables of Print Head	- Standard 1.5m - To be customized: 5m, 10m, 15m
Information Storage Capacity	Built-in 32GB storage, in which 12GB can be used to store information

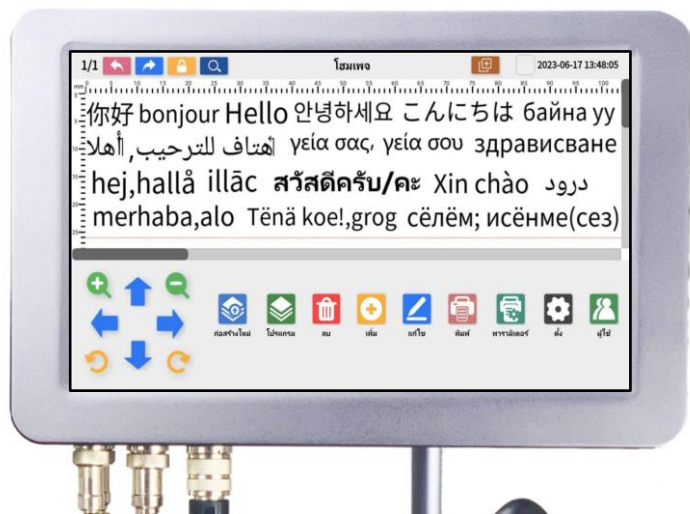

PROMARK COMPANY LIMITED

2 Soi Rewadee 42, Rewadee Rd.,
Talat Khwan, Mueang Nonthaburi,
Nonthaburi 11000 Thailand
Tel : (662)719-6770-3
Fax : (662)719-6531

Email :

- sales@promark.co.th
- promark@promark.co.th
- promark-promark@hotmail.com
Website : www.promark.co.th